



## Rhepanol® fk standing seam profile




The Rhepanol fk standing seam profile is a solid polyisobutylene profile with a prefabricated self-sealing edge for installation on Rhepanol fk.  
Length 2 m.

### Range of application

On sloped areas for a visually attractive imitation of standing seams on Rhepanol fk.

### Properties

- Flexible for perfect fitting to the geometry of the roof.
- Simple application with self-sealing edge system which needs no power supply.
- Trimming and cutting with standard tools.
- Can be coated with Rhepanol roof paint copper and silver or other colours on request.

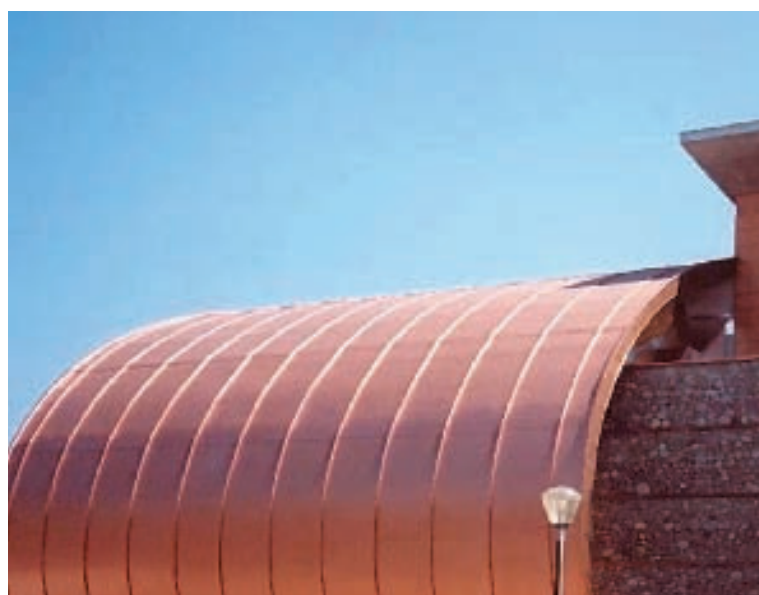

### Application instructions

- The application direction is always from the ridge to the eaves.
- Do not apply through valley areas as this may impede rainwater drainage.
- The profile is placed on the seam, so there is no need for additional marking.
- A special hand roller is used for pressing on the profile.

### Form of supply

Product	Form of supply
Rhepanol fk standing seam profile grey	100 m/card-boardbox
Hand roller for Rhepanol fk standing seam profile	1 unit
Rhepanol roof paint	5 litres